



Kerala Co-operative Milk Marketing Federation Limited
Cattle Feed Plant, Malampuzha P.O., Palakkad-678 651
Tel: 0491-2816317, 2816316, E-mail: cfm@milma.com
GST No.32AAAANK5375M6ZB

No:CFP-M/PROD/588/2021-2022

23.10.2021

Quotation Notice

Sealed quotations are invited from experienced civil contractors for the repairing and maintenance of compound wall at cattle feed plant Malampuzha .

SCOPE OF WORK

Sl. No	Particulars of work	NO	L	B	D	CF	Qty	Unit	Unit rate	Total
1	Earth Work									
1.1	Earth work in excavation by mechanical means (Hydraulic excavator)/manual means over areas (exceeding 30 cm in depth, 1.5 m in width as well as 10 sqm on plan) including disposal of excavated earth, lead up to 50 m and lift up to 1.5 m, disposed earth to be levelled and neatly dressed. All kinds of soil									
	Compound Wall	1	19.00	1.00	0.60		11.40	cum		
					Total quantity		11.40	cum		
1.2	Filling available excavated earth (excluding rock) in trenches, plinth, sides of foundation etc. in layers not exceeding 20 cm in depth, consolidating each deposited layer by rramming and watering, lead up to 50 m and lift up to 1.5 m.									
	back filling	1	19.00	1.00	0.6	0.50	5.70	cum		



Kerala Co-operative Milk Marketing Federation Limited
Cattle Feed Plant, Malampuzha P.O., Palakkad-678 651
Tel: 0491-2816317, 2816316, E-mail: cfm@milma.com
GST No.32AAAAAK5375M6ZB

2.4	Providing and laying in position cement concrete of specified grade excluding the cost of centering and shuttering - All work up to plinth level:1:5:10 (1 cement : 5 coarse sand : 10 graded stone aggregate 40 mm nominal size)								
	PCC	1	19.00	0.60	0.10		1.141	cum	
						Total quantity	1.141	cum	
3	MASONRY WORK								
3.1	Solid block masonry using pre cast solid blocks (Factory made) of size 30x20x20cm or nearest available size confirming to IS 2185 part I of 1979 for foundation and plinth with thickness 20cm and above in: CM 1:6 (1 cement : 6 coarse sand) etc complete								
	Compound wall	1	2.00	0.20	3.00		1.201	cum	
		1	6.00	0.20	1.00		1.201	cum	
		1	11.00	0.20	0.75		1.651	cum	
	Pillar	6	1.20	0.45	0.45		1.459	cum	
						Total quantity	5.512	cum	
3.2	Random rubble masonry with hard stone in foundation and plinth including levelling up with cement concrete 1:6:12 (1 cement : 6 coarse sand : 12 graded stone aggregate 20 mm nominal size) up to plinth level with: Cement mortar 1:6 (1 cement : 6 coarse sand)								
	Foundation	1	8.00	0.50	0.75		3.000	cum	
		1	11.00	0.50	0.60		3.300	cum	
						Total quantity	6.300	cum	



milma

Kerala Co-operative Milk Marketing Federation Limited
Cattle Feed Plant, Malampuzha P.O., Palakkad-678 651
Tel: 0491-2816317, 2816316, E-mail: cfm@milma.com
GST No.32AAAANK5375M6ZB

4	FINISHING								
4.1	12 mm cement plaster of mix:1:4 (1 cement : 4 fine sand)								
	Compound wall	2	3.00		2.00		12.00	sqm	
		2	6.00		1.00		12.00	sqm	
		2	11.00		0.75		16.50	sqm	
	Pillar	6	1.200		1.80		12.96	sqm	
					Total quantity		53.460	sqm	
4.2	Pointing on stone work with cement mortar 1:3 (1 cement : 3 fine sand):Raised and cut pointing								
	foundation	1	19.00		0.75		14.25	sqm	
					Total quantity		14.250	sqm	
4.3	Finishing walls with Premium Acrylic Smooth exterior paint with Silicone additives of required shade:New work (Two or more coats applied @ 1.43 ltr/ 10 sqm over and including priming coat of exterior primer applied @ 2.20 kg/ 10 sqm)								
	Compound wall	2	3.00		2.0		12.00	sqm	
		2	6.00		1.0		12.00	sqm	
		2	11.00		0.75		16.50	sqm	
	Pillar	6	1.20		1.8		12.96	sqm	



Kerala Co-operative Milk Marketing Federation Limited
Cattle Feed Plant, Malampuzha P.O., Palakkad-678 651
Tel: 0491-2816317, 2816316, E-mail: cfm@milma.com
GST No.32AAAK5375M6ZB

General Conditions :

1. Applicable statutory deductions like GST, income tax, sales tax, EPF/ ESI, Work contract tax, etc. shall be effected while settling bills. The contractors must remit ESI/EPF for the work and for their employees should produce proof of remittance to avoid the ESI cutting while submitting the bills. Submit the challan as the proof of remittance along with bills, for considering release of payment. Without the ESI/EPF remittance proof payments will be released only after cutting the ESI/EPF from the bills.
2. All essential materials required for the work shall be brought to the site before commencing the work.
3. Specifications shall be as mentioned in the schedule of quantities. In case for clarification, our Engineer shall be contacted before taking up the particular work.
4. The quantities and items of works mentioned in the schedule are tentative. Manager reserves the right to place work order for part of the schedule, depending upon the financial implications. Payment shall be effected only for those quantities actually executed at site.
5. The materials shall be inspected by our engineers before acceptance. The materials shall be of our approved make as per the schedule.
6. Each item of work shall be approved prior to commencement of the next work.
7. The contractor shall arrange for all compliance to the ESI/PF rules in force. Cattle Feed Plant shall not be liable for any benefits/compensation to the workers engaged by the contractor, in the event of accidents/mishaps etc. during execution of work. The contractor shall provide suitable safety measures to their Workers and also the plant raw materials stored in that area in case of any emergency like rain/wind etc..
8. The contractor or his workmen shall not interfere in any activity of the Plant and/or cause any damages to buildings/property. The entry of all such labourers will be on the basis of gate pass, which will have to be arranged by the Contractor prior to starting the work. In the event of any damage to Cattle Feed Plant's property, the contractor alone shall be liable.
9. Income tax, , ESI and other applicable statutory deductions shall be effected while settling bills.
10. The plant day to day activities should not be affected during the course of work.
11. The work found inferior in quality/ bad workmanship the same shall be redone at contractor's risk and cost.

EARNEST MONEY DEPOSIT:

1. The offer should be accompanied by an EMD of Rs.1,500/- (Rupees One thousand five hundred Only)
2. The EMD shall be in the form of cash or demand draft drawn in favour of Managing Director, Kerala Co-operative Milk Marketing Federation Limited.
3. Offers without EMD are liable to be rejected, No EMD exception is applicable.
4. The EMD of the unsuccessful quotationers will be released on finalisation of the contract. The EMD of the successful quotationer will be released only after satisfactory completion of the work in all respects.
5. No interest will be paid for the EMD for the period for which it lies with the KCMMF.



Kerala Co-operative Milk Marketing Federation Limited
Cattle Feed Plant, Malampuzha P.O., Palakkad-678 651
Tel: 0491-2816317, 2816316, E-mail: cfm@milma.com
GST No.32AAAK5375M6ZB

Terms and Conditions:


1. The contractor shall provide all the material required for the works.
2. The contractor shall supply tools and tackles required for the works.
3. **The entire works shall be completed within 30 days from the date receipt of the order .**
4. All the works shall be carried out as per the directions of our plant engineer.
5. The contractor shall guarantee to rectify any defect noticed in works due to bad workmanship within **one year** from the date of completion of the work.
6. All safety measures shall be taken for the work like including safety belts, scaffolding's etc. work permit shall be taken before the commencement of work. All risk shall be covered by contractor as per norms.
7. **Payment terms:** 90% payment will be released on satisfactory receipt and completion of the entire work and balance 10% shall be released after the guarantee period.
8. **LIQUIDATED DAMAGES CLAUSE:** In the case of work is not completed within the stipulated period, liquidated damages @1% will be charged for the work so delayed subject to a maximum of 10% of the total value.
9. Our bankers are : **SBI PALAKKAD / CANARA BANK MALAMPUZHA**

The sealed **super scribed** offer must be submitted on or before 29.10.2021 02:00 pm to the Manager, Cattle feed plant, Malampuzha, and will be opened at 3:00 P.M. on the same day.

The undersigned reserves the right to accept any or reject all the quotations without assigning any reason.

Thanking you,

Yours faithfully,

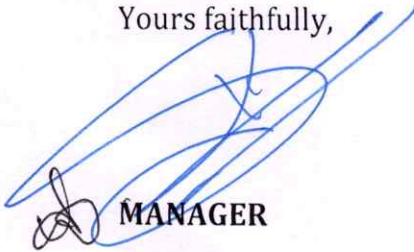

MANAGER

Copy to: AO ,DE (P& M)

To,

1. All Notice Boards
2. Canara Bank
3. ITI, Malampuzha
4. Panchayath Office
5. Local daily
6. Milma website.